

# DOOR / WINDOW SENSOR

Model 5820L



## BATTERY YOU'LL NEED

### AAA Lithium


One AAA lithium battery — not alkaline



**Please Note:** This thin bar sensor mounts on a door or window frame. When you open the cover you may hear your keypad start beeping — that's the tamper switch, and it's completely normal. The reset at the end silences it and clears the low-battery message.

**Use a AAA lithium battery only.** Standard alkaline AAA batteries will not power this sensor correctly.

**Open the cover:** Press the small tab on the **end** of the sensor and separate the cover from the base.

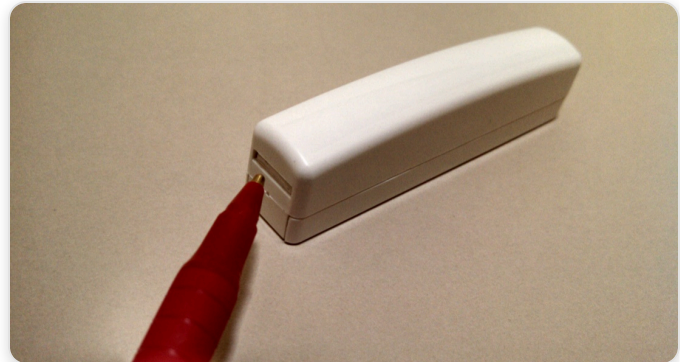

**Replace the battery:** Remove the old battery and install a new **AAA lithium** battery, matching the + and - markings. **Do not use alkaline.**

**Close the cover:** Snap the cover back onto the base until it clicks.



**You can now reset your system:** Enter your 4-digit code and press **OFF**, then enter your code and press **OFF** again. (*Code + OFF, Code + OFF.*) The beeping stops and the low-battery message clears — your system is ready to use again.

**Any Questions? Please give us a call:**

**(718) 698-8244**